
Semi-Frameless 3/8" Bypass

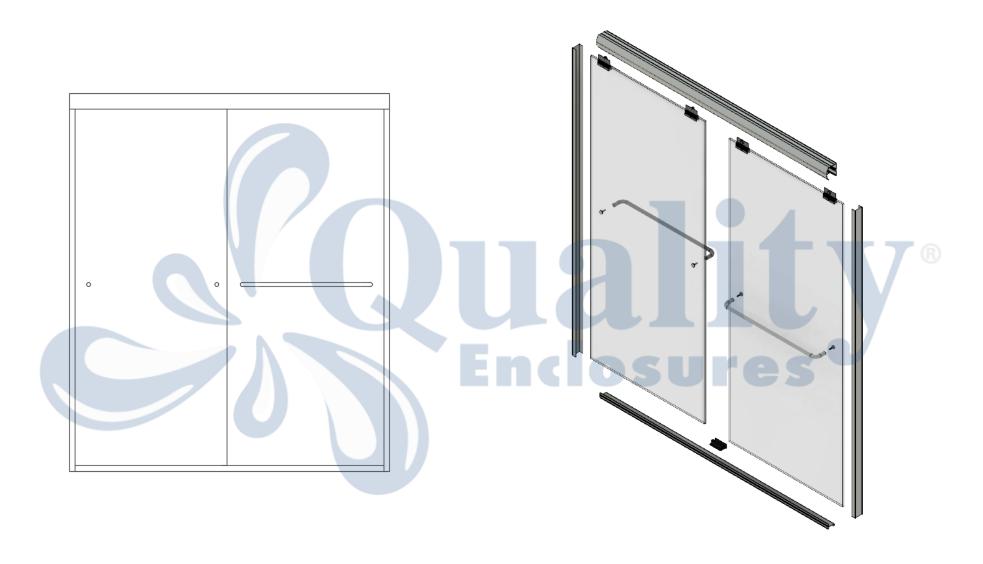

Specifications

Glass—All glazing materials shall meet or exceed ANSI Z97.1-2015 and 16 CFR 1201 II.

<u>Aluminum</u>—Extruded shapes to be 6463-T6 or T5 depending on application.

<u>Finish</u>—Anodized to AA-C31-A21 specifications.

<u>Clear Polycarbonate</u>—Extruded clear Lexan-141 meeting or exceeding the ATSM-D790 Flexural Strength Test and the ASTM-D256 Izod Impact Test.

